REMARKS

Claims 1-6 are presently pending in the captioned application with no claim amendments being made at this time.

In the outstanding Office Action, the Examiner withdrew the finality of the previous Final Office Action of August 28, 2003, because the finality was not necessitated by Applicant's last amendment to the claims. Applicant acknowledges that change with appreciation.

The Examiner also notes that Applicant's previous arguments have been considered but are now moot in view of the new ground of rejection over U.S. Patent No. 5,362,572 ("Hamada et al."). The new rejection over Hamada et al. is discussed herein without amendment wherein Applicant will show that Hamada et al. fails to teach and every claimed limitation of the presently claimed invention.

Referencing Fundamental Principles of Polymeric Materials, the Examiner states that styrene-b-butadiene-b-styrene (SBS) is a thermoplastic elastomer having the hard segments and the soft segments connected to each other and requiring no crosslinking. Although such a block copolymer is indeed a thermoplastic elastomer, the presently claimed composition is also a thermoplastic elastomer wherein the Examiner's statement in no way detracts from the novelty and patentability of the presently

2

claimed composition. In support thereof, copies of literature articles by A.Y. Coran et al., Rubber Chemistry and Technology, 53, 141 (1980) and A.Y. Coran et al., Rubber Chemistry and Technology, 55, 116 (1982) are submitted herewith to establish the state of the art with respect to thermoplastic elastomers.

Accordingly, Applicant respectfully requests the Examiner to carefully reconsider the rejection and allow all claims pending in this application in view of the following.

1. **Rejection of Claims 1-6 under 35 U.S.C. § 102(b)**

The Office Action rejects claims 1-6 under 35 U.S.C. § 102(b) as being anticipated by U.S. Patent No. 5,362,572 ("Hamada et al."). The Office Action states:

> Hamada et al. teach a two-layer thermoplastic elastomer sheet useful in producing molded products for automobiles comprising a skin layer and a reverse surface layer wherein a first laminate embodiment comprises [I] a skin layer composed of a thermoplastic elastomer containing 1-85 parts by weight of a polyolefin resin (A) such as homopolymers and copolymers of ethylene or propylene or a mixture of polyethylene or polypropylene having a mixing ratio of 10/90 to 70/30 (polyethylene/polypropylene), and 15-99 parts by weight of an alpha-olefin copolymer rubber (B) such as an ethylene-propylene-non-conjugated rubber; and [II] a reverse surface layer composed of a thermoplastic elastomer containing 6 to 90 parts by weight of

3

polyolefin resin (A), and 10 to 94 parts by
weight of alpha-olefin copolymer rubber (B);
wherein the skin and surface layers may
further contain 5 to 100 parts by weight, more
preferably 20 to 70 parts by weight, per 100
parts by weight of the sum of polyolefin resin
(A) and olefin rubber (B), of a mineral oil
softening agent (D); and wherein the
thermoplastic elastomers of both layers may be
partially crosslinked by dynamically heat
treating the blends in the presence of a
crosslinking agent (Abstract; Col. 1, line 64-
Col. 2, line 17; Col. 2, line 56-Col. 6, line
21). In a second preferred embodiment, Hamada
et al teach a second two-layer thermoplastic
elastomer sheet including a skin layer (I)
which includes a mixture of 100 parts by
weight of the partially crosslinked elastomer
and 5 to 100 parts by weight of a polyolefin
resin (E) such as polyethylene, wherein the
mixture is dynamically heat treated in the
presence of a crosslinking agent (Col. 3,
lines 6-11; Col. 5, lines 16-28). Hamada et
al further teach examples that read upon the
instantly claimed weight parts and oily
softening agent ratios, specifically with
regards to instant claim 1, Examples 1 and 2
read upon the invention wherein Example 1
teaches a laminate comprising a skin layer of
37 weight parts polyolefin, 63 weight parts
ethylene-alpha-olefin non-conjugated polyene
rubber, 30 parts oily softening agent
dynamically heat treated with a crosslinking
agent; and a surface layer comprising 50
weight parts polyolefin, 50 weight parts
ethylene-alpha-olefin non-conjugated polyene
rubber, 30 parts oily softening agent
dynamically heat treated with a crosslinking
agent; hence when calculated according to the
instantly claimed basis, the weight parts of
each of the components fall within the
instantly claimed ranges and the oily ratio
(a) is greater than the oily ratio (b)
(Example 1). With regards to instant claim 2,
Example 3 which incorporates polyethylene into
the skin layer reads upon the weight part

4

ranges instantly claimed wherein the oily
ratio (a') is greater than 0.8 of the oily
ratio (b') as instantly claimed. With regards
to claims 3-6, the Examiner takes the position
that the terms "glass-run channel" and "roof
molding, side molding or window molding for
automobiles" recited in the preamble do not
add any additional structure to the instantly
claimed laminate and hence the laminate taught
by Hamada et al anticipates these claims.

Applicant respectfully traverses the anticipation rejection
because Hamada et al. fails to teach the presently claimed ratio
(a) $\geq$ ratio (b). In particular, the skin layer [I] of Hamada et
al. corresponds to the presently claimed "surface layer" having a
ratio (a) and the skin layer [II] corresponds to the presently
claimed "underlayer" having a ratio (b). Upon calculating the
ratio relationship of the component taught by the Examples 1 and 2
of Hamada et al., it is clear that the ratio relationship is ratio
$(a)_{Hamada} <$ ratio $(b)_{Hamada}$, which is the reverse of the presently
claimed relationship of ratio (a) $\geq$ ratio (b). Based on the
opposite ratio relationship taught by the cited reference, one of
ordinary skill would clearly have been unable to make the presently
claimed invention without undue experimentation.

Turning to the rule, the Federal Circuit has spoken clearly
and at some length on the question of anticipation. Anticipation
requires that each and every element of the claimed invention be
disclosed in a single prior art reference. Verdegaal Bros. v.

5

Union Oil Co. of California, 2 USPQ2d 1051, 1053 (Fed. Cir. 1987).

Those elements must be expressly disclosed as in the claim. In re

Bond, 15 USPQ2d 1566 (Fed. Cir. 1990).

The prior art reference must also be enabling, thereby placing

the allegedly disclosed matter in the possession of the public. In

re Brown, 329 F.2d 1006, 1011, 241 USPQ 245, 249 (C.C.P.A. 1964).

In order to accomplish this, the reference must be so particular

and definite that from it alone, without experiment or the exertion

of his own inventive skill, any person versed in the art to which

it pertains could construct and use it. Id. at 250.

In the present application, presently pending claim 1 recites

a laminated material, comprising:

(i) a **surface layer** comprising a polyolefinic thermoplastic

elastomer (A) manufactured by dynamically heat treating, in the

presence of a crosslinking agent, 10 to 60 wt. parts of a

polyolefin resin (X), 30 to 70 wt. parts of a rubber component (Y)

comprising at least an ethylene-α-olefin-non-conjugated polyene

copolymer rubber and 5 to 50 wt. parts of an oily softening agent

(Z), the total of (X), (Y) and (Z) being 100 wt. parts, and

(ii) an **underlayer** comprising a polyolefinic thermoplastic

elastomer (B) manufactured by dynamically heat treating, in the

presence of a crosslinking agent, 10 to 60 wt. parts of a

polyolefin resin (X'), 30 to 70 wt. parts of a rubber component

(Y') comprising at least an ethylene-α-olefin-non-conjugated polyene copolymer rubber and 5 to 50 wt. parts of an oily softening agent (Z'), the total of (X'), (Y') and (Z') being 100 wt. parts, which underlayer is laminated on the surface layer,

wherein the ratio (a) of the oily softening agent (Z) to the total of the rubber component (Y) and the oily softening agent (Z), or if polyethylene is incorporated, to the total of the rubber component (Y), the oily softening agent (Z) and polyethylene in said thermoplastic elastomer (A) and the ratio (b) of the oily softening agent (Z') to the total of the rubber component (Y') and the oily softening agent (Z'), or if polyethylene is incorporated, to the total of the rubber component (Y'), the oily softening agent (Z') and polyethylene in said thermoplastic elastomer (B) satisfy the relationship:

$$\text{ratio (a)} \geq \text{ratio (b).}$$

In contrast, the cited Hamada et al. reference teaches the relationship:

$$\text{ratio (a)}_{Hamada} < \text{ratio (b)}_{Hamada}.$$

Notably, the skin layer [I] of Hamada et al. corresponds to the presently claimed "surface layer" having a ratio (a) while the skin layer [II] of Hamada et al. corresponds to the presently claimed "underlayer" having a ratio (b).

This can be seen from the teaching in Hamada et al. that the

7

thickness of the skin layer [I] constituting a <u>skin layer</u> of the vacuum forming molded product is generally in the range of 0.01 to 50 mm, preferably 0.10 to 20 mm, while the thickness of the other layer [II] constituting the <u>inner layer</u> of the vacuum forming molded product is generally in the range of 0.01 to 100 mm, preferably 0.10 to 50 mm. <u>See</u> Hamada et al. at col. 9, lines 27-34. Clearly, the skin layer composed of TPE (I) and the reverse surface layer composed of TPE (II) in Example 1 of Hamada et al. correspond to the surface layer and the underlayer of the present invention, respectively.

Turning to the calculation of the ratios of Hamada et al., it is noted, as in the Office Action, that Example 1 of Hamada et al. teaches a laminate comprising a skin layer of 37 weight parts polyolefin, 63 weight parts of rubber and 30 parts oily softening agent. Hence, the ratio of the skin layer [I] of Hamada et al. can be represented as:

$$\frac{30 \ (Z)}{63 \ (Y) \ + \ 30 \ (Z)} = \text{ratio (a)}_{Hamada}$$

Notably, claim 1 defines the ratio (a) as oily softening agent (Z) to the total of the rubber component (Y) and the oily softening agent (Z).

As further noted in the Office Action, Example 1 of Hamada et al. also teaches an **inner** layer comprising 50 weight parts

8

polyolefin, 50 weight parts rubber and 30 parts oily softening agent. Hence, the ratio of the inner skin layer [II] of Hamada et al. can be represented as:

$$\frac{50 \ (Z')}{50 \ (Y') \ + \ 30 \ (Z')} = \text{ratio (b)}_{\text{Hamada}}$$

Again, claim 1 defines the ratio (b) as the oily softening agent (Z') to the total of the rubber component (Y') and the oily softening agent (Z').

Based on a quick calculation, it can easily be seen that Hamada et al. teaches the relationship of ratio (a)$_{\text{Hamada}}$ < ratio (b)$_{\text{Hamada}}$. Although cited in the Office Action, Example 2 of Hamada et al. also shows the same equality relationship ratio (a)$_{\text{Hamada}}$ < ratio (b)$_{\text{Hamada}}$ wherein only the rubber component (Z) of the surface layer is slightly higher at 65 weight parts and the rubber component (Z') of the inner layer is also slightly higher at 55 weight parts. Clearly, the cited reference fails to teach the presently claimed relationship of ratio (a) ≥ ratio (b).

Accordingly, Applicant submits that each and every claim limitation is not taught by Hamada et al. and requests the Examiner to reconsider and withdraw the rejections of claims 1-6 under 35 U.S.C. § 102(b).
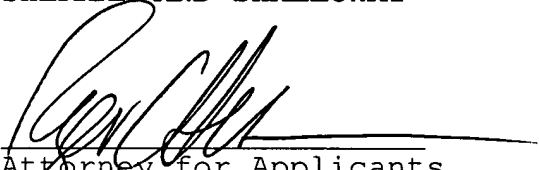
CONCLUSION

In light of the foregoing, Applicants submit that the application is now in condition for allowance. The Examiner is therefore respectfully requested to reconsider and withdraw the rejection of the pending claims and allow the pending claims. Favorable action with an early allowance of the claims pending is earnestly solicited.

Respectfully submitted,

SHERMAN AND SHALLOWAY

Attorney for Applicants
Roger C. Hahn
Reg. No. 46,376

SHERMAN AND SHALLOWAY
413 N. Washington Street
Alexandria, Virginia 22314
703-549-2282

10